




WE LOVE RAIN

---

# ASSEMBLY INSTRUCTIONS GUTTER JOINT



Please read thru the instructions carefully before beginning assembly.  
Notice that closing and opening the clamp too many times will weaken it to the point where it will break.

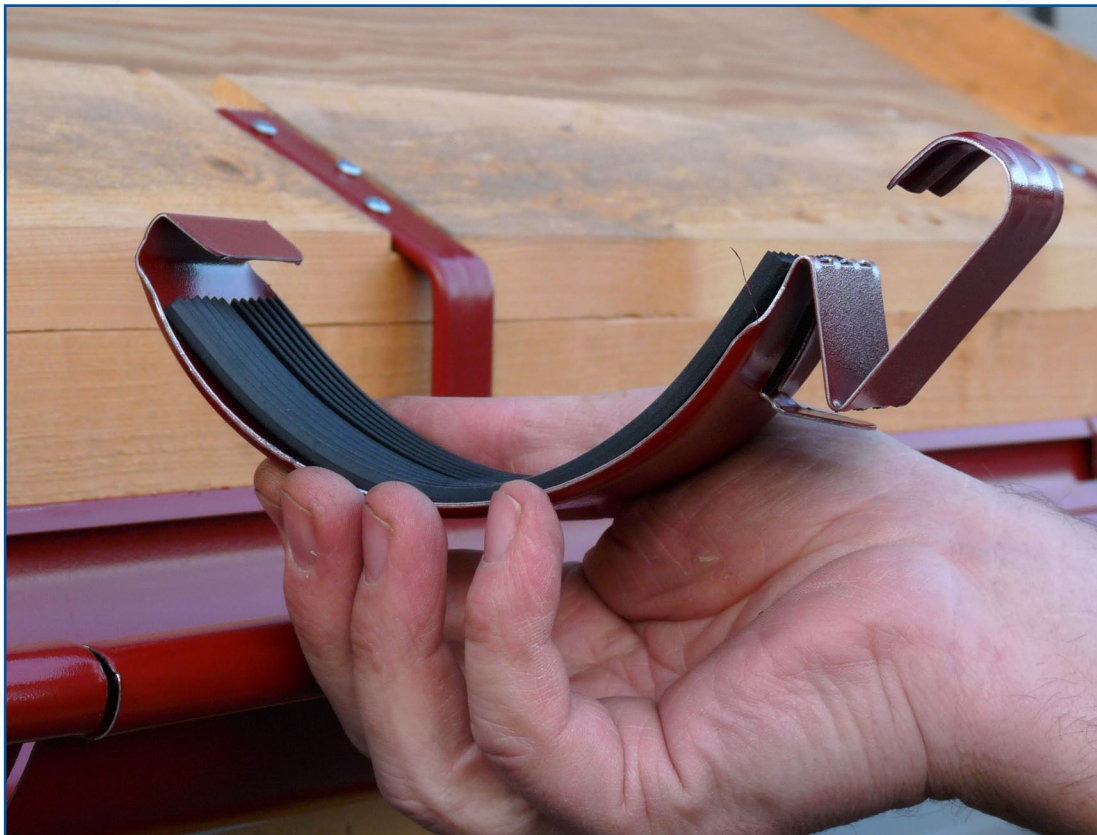

1. Untouched gutter joint.



2. Open up the clamp a little bit at both joints according to picture.



3. Fit the gutter joint tightly on the inner side of the gutter.




4. Make sure the gutter joint fits tightly against the two gutter pieces beginning from the inner side.
5. Keep a pressure with one hand according to the picture, so that there is no play between the pieces.



6. Bend the clamp inwards to fit over the edge of the gutter.



7. While still keeping pressure with one thumb/hand, with the other hand press the clamp downwards/inwards to fit tightly against the gutter.

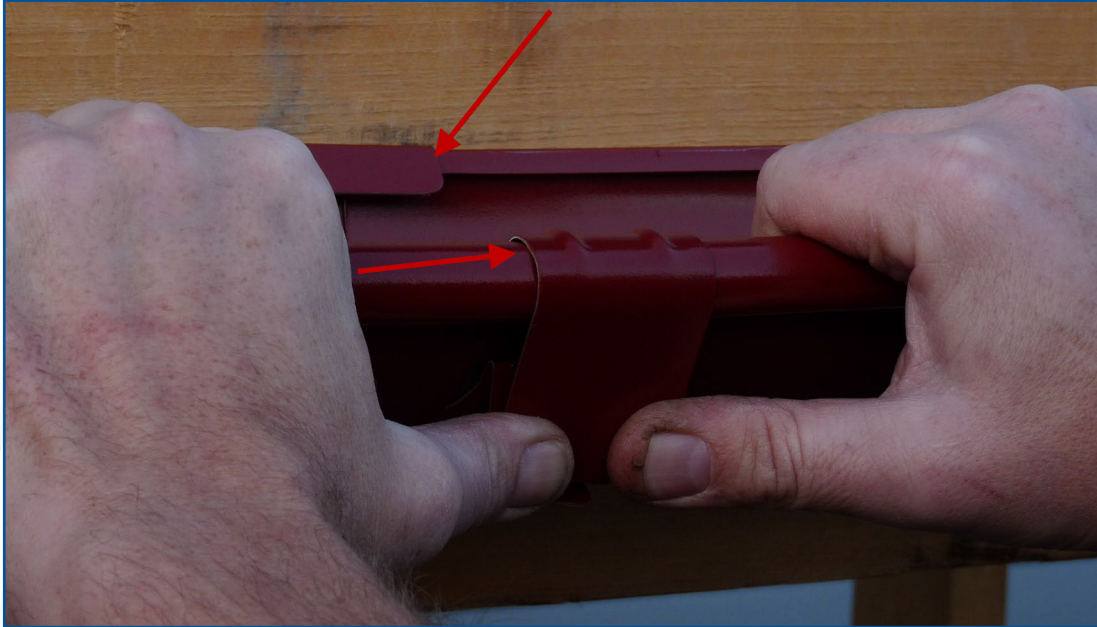

8. Press the clamp of the gutter joint tight against the gutter so that the inner part and outer part of the clamps touch the gutter without play.



9. Then you will be able use both hands to bend the clamp fully together.



10. Finally secure the clamp with the small clip.

